
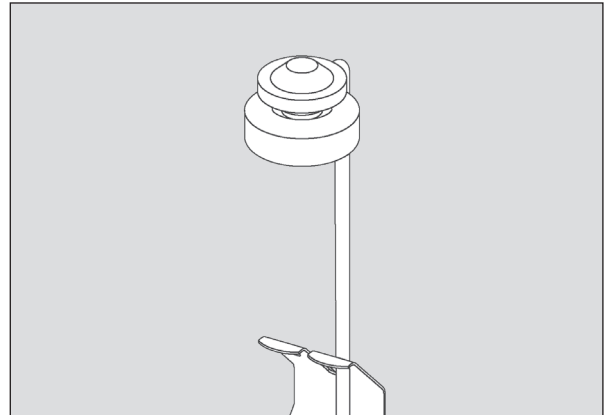


Eyelet wire with vibration element

Item no. 10XXXX

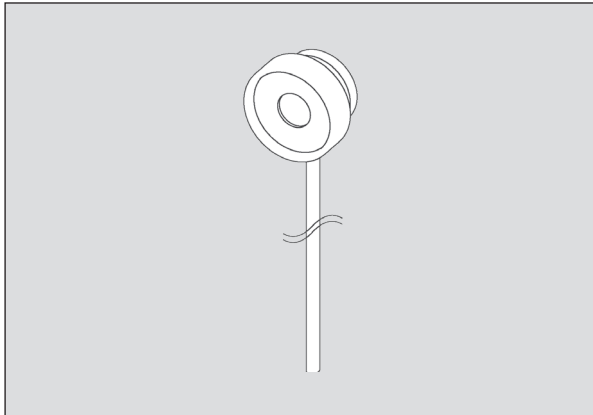

Application

Connecting wiring between mounting on structural soffit and a suspended bracket with tension spring. 4 mm diameter, galvanised. With vibration element.

Characteristics

- | | | | | |
|--|-----------|-----------------|-----------|-----------------|
| ■ Available in the following lengths
(custom lengths on request): | ■ 125 mm | Item no. 101628 | ■ 1250 mm | Item no. 101640 |
| | ■ 250 mm | Item no. 101630 | ■ 1500 mm | Item no. 102087 |
| | ■ 375 mm | Item no. 101632 | ■ 1750 mm | Item no. 101641 |
| | ■ 500 mm | Item no. 101634 | ■ 2000 mm | Item no. 101642 |
| | ■ 750 mm | Item no. 101636 | ■ 2500 mm | Item no. 101643 |
| | ■ 1000 mm | Item no. 101638 | ■ 3000 mm | Item no. 101644 |

Technical data

Material	Zinc-plated sheet steel	Packing unit	100 pcs. / PU
Material thickness	4.0 mm	Fire behaviour	Class A1
Shelf life	Unlimited	Load-bearing capacity	---
Storage conditions	Store in a dry place protected against moisture and wetness	Corrosion protection	Class B
<i>(Relevant test certificates / declarations of performance can be requested, if necessary.)</i>			

Notes

- Suitable for use in damp rooms only if provided with special anti-corrosive coating (on request).
- Not suitable for outdoor installation.