
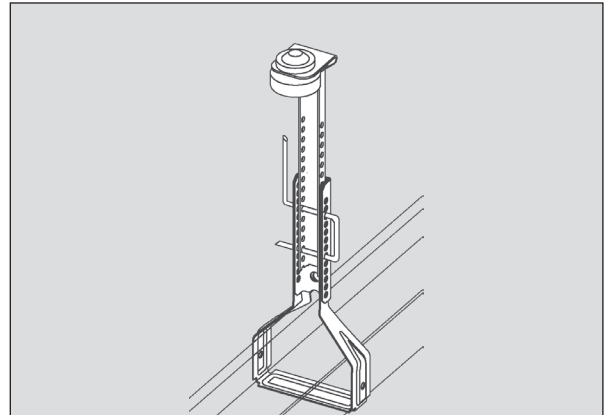


Vernier top part with vibration element

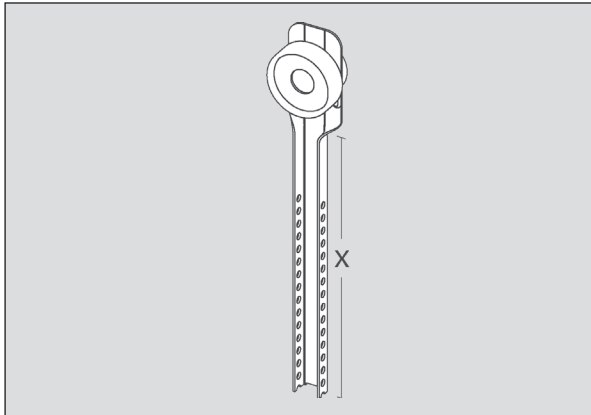

Application

Suspended bracket for mounting to the structural soffit and connection with a vernier bottom part using a security pin; up to 1000 mm length perforated all the way to the head, with vibration element 4 mm

Characteristics

- Available in the following lengths (custom lengths on request).
 - 200 mm Item no. 101648; 36 PU / pallet
 - 300 mm Item no. 101651; 36 PU / pallet
 - 400 mm Item no. 101654; 36 PU / pallet
 - 500 mm Item no. 101657; 24 PU / pallet
 - 600 mm Item no. 101660; 24 PU / pallet
 - 700 mm Item no. 101663; 24 PU / pallet
 - 800 mm Item no. 101666; 18 PU / pallet
 - 900 mm Item no. 101804; 18 PU / pallet
 - 1000 mm Item no. 101671; 18 PU / pallet
- The dimensions indicated relate to the suspension height up to „bottom edge of finished ceiling“!**

Technical data

Material	Zinc-plated sheet steel	Packing unit	Up to 1000 mm – 100 pcs./PU, 1100 mm and up – 25 pcs./PU
Material thickness	0.9 mm	Fire behaviour	Class A1
Shelf life	Unlimited	Load-bearing capacity	400 N (normal load)
Storage conditions	Store in a dry place protected against moisture and wetness	Corrosion protection	Class B

(Relevant test certificates / declarations of performance can be requested, if necessary)

Notes

- Suitable for use in damp rooms only if provided with special anti-corrosive coating (on request)
- Not suitable for outdoor installation