
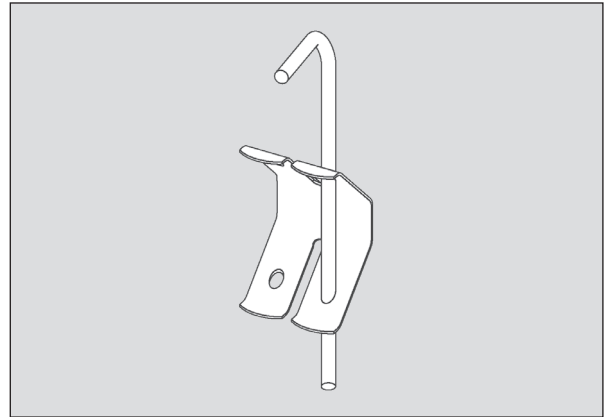


Hooked wire, various lengths

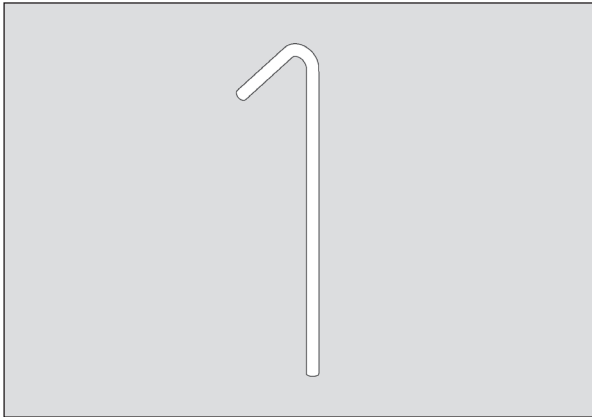

Application

Hooked wire for suspension of T-profile systems with appropriate notching; diameter 4 mm, galvanised

Characteristics

- | | | | | |
|---|-----------|----------------------------------|-----------|----------------------------------|
| <ul style="list-style-type: none"> Available in the following lengths (custom lengths on request): | ■ 125 mm | Item no. 100944; 300 PU / pallet | ■ 1250 mm | Item no. 100950; 100 PU / pallet |
| | ■ 250 mm | Item no. 100945; 200 PU / pallet | ■ 1500 mm | Item no. 101809; 100 PU / pallet |
| | ■ 375 mm | Item no. 100946; 150 PU / pallet | ■ 1750 mm | Item no. 100952; 50 PU / pallet |
| | ■ 500 mm | Item no. 100947; 100 PU / pallet | ■ 2000 mm | Item no. 100954; 50 PU / pallet |
| | ■ 750 mm | Item no. 100948; 100 PU / pallet | ■ 2500 mm | Item no. 100955; 50 PU / pallet |
| | ■ 1000 mm | Item no. 100949; 100 PU / pallet | ■ 3000 mm | Item no. 100956; 50 PU / pallet |

Technical data

Material	Zinc-plated sheet steel	Packing unit	100 pcs. / PU; 144 PU / pallet
Material thickness	4,0 mm	Fire behaviour	Class A1
Shelf life	Unlimited	Load-bearing capacity	--
Storage conditions	Store in a dry place protected against moisture and wetness	Corrosion protection	Class B

(Relevant test certificates / declarations of performance can be requested, if necessary)

Notes

- Suitable for use in damp rooms only if provided with special anti-corrosive coating (on request)
- Not suitable for outdoor installation