
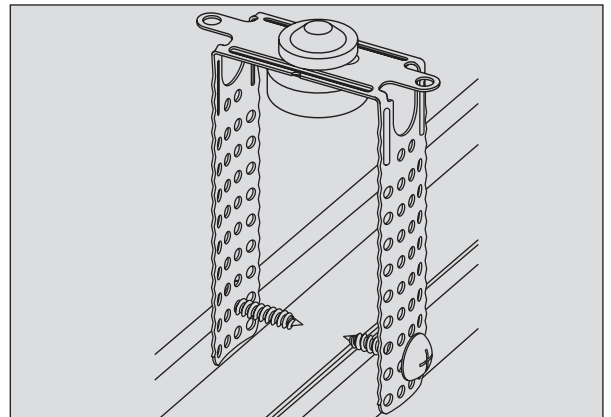


## Direct vibration hanger, 120 mm, 4-hole, CD 60/27

Item no. 100919

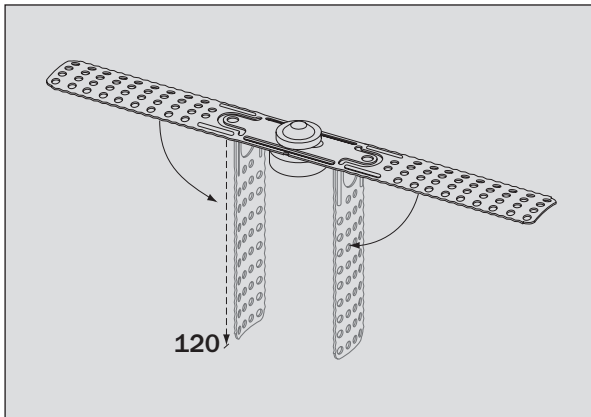

### Application

Mounting of CD 60/27 profiles directly to the structural subbase with the option of compensating up to 120 mm. The vibration hanger is additionally equipped with an element for acoustic decoupling (vibration element).

### Characteristics

- Flat design for compact handling on the construction site.
- The vibration element reduces sound transmission.
- The limbs are cambered to provide increased rigidity.

### Technical data

<b>Material</b>	Zinc-plated sheet steel	<b>Packing unit</b>	100 pcs. / PU
<b>Material thickness</b>	0.9 mm	<b>Fire behaviour</b>	Class A1
<b>Shelf life</b>	Unlimited	<b>Load-bearing capacity</b>	400 N (normal load)
<b>Storage conditions</b>	Store in a dry place protected against moisture and wetness	<b>Corrosion protection</b>	Class B

(Relevant test certificates / declarations of performance can be requested, if necessary.)

### Notes

- Suitable for use in damp rooms only if provided with special anti-corrosive coating (on request).
- Not suitable for outdoor installation.