
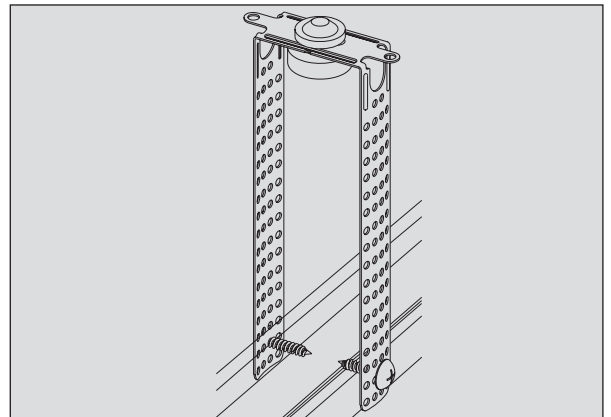


Direct vibration hanger, 200 mm, 4-hole, CD 60/27

Item no. 100921

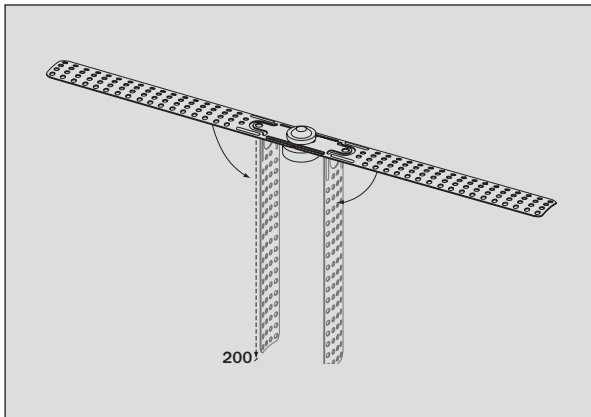

Application

Mounting of CD 60/27 profiles directly to the structural subbase with the option of compensating up to 200 mm. The vibration hanger is additionally equipped with an element for acoustic decoupling (vibration element).

Characteristics

- Flat design for compact handling on the construction site.
- The vibration element reduces sound transmission.
- The limbs are cambered to provide increased rigidity.

Technical data

Material	Zinc-plated sheet steel	Packing unit	100 pcs. / PU
Material thickness	0.9 mm	Fire behaviour	Class A1
Shelf life	Unlimited	Load-bearing capacity	400 N (normal load)
Storage conditions	Store in a dry place protected against moisture and wetness	Corrosion protection	Class B
<i>(Relevant test certificates / declarations of performance can be requested, if necessary.)</i>			

Notes

- Suitable for use in damp rooms only if provided with special anti-corrosive coating (on request).
- Not suitable for outdoor installation.