


Acoustic Design Boards

Product Date Sheet 130

Sound Absorption

Acoustic Design Board 8/12/50R (round)

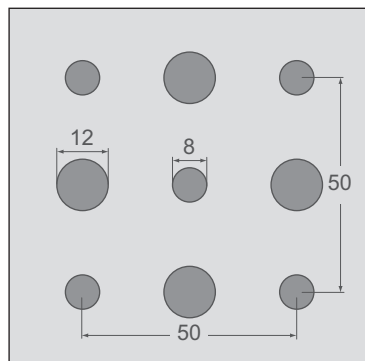

- Sound Absorption Value defined in accordance with DIN EN ISO 354
- Sound Absorption evaluated in accordance with DIN EN ISO 11654

Thickness of the Board:

$d = 12,5 \text{ mm}$

Density:

$8,70 \text{ kg/m}^2$

Perforated Area:

13,1 %

Building Material Classification according DIN 4102: A2, "non combustible"

Fire performance according DIN EN 13501:

A2-s1, d0


Back of tile laminated with
Acoustic fleece AV 2010

Sound Absorption $\alpha_W = 0,55$

Sound Absorbing Classification **D** (absorbing)

Ceiling Void: 65 mm

Frequency in [Hz]	125	250	500	1000	2000	4000
Sound Absorption coefficient α_p	0,10	0,25	0,60	0,70	0,65	0,45

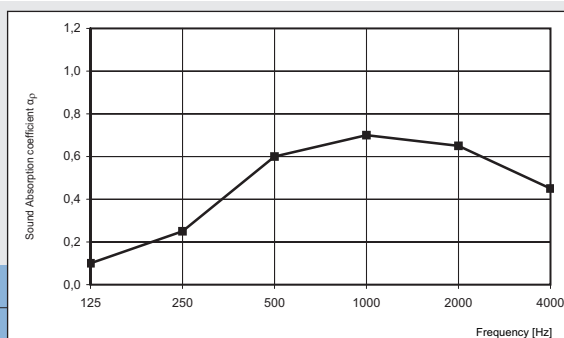


Back of tile laminated with
Acoustic fleece AV 2010 +
Glass wool sound protection board SSP 1, 30 mm

Sound Absorption $\alpha_W = 0,70$

Sound Absorbing Classification **C** (high absorbing)

Ceiling Void: 65 mm

Frequency in [Hz]	125	250	500	1000	2000	4000
Sound Absorption coefficient α_p	0,25	0,45	0,70	0,70	0,70	0,55

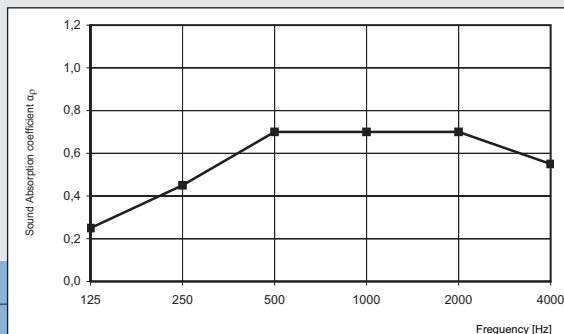

Back of tile laminated with
Acoustic fleece AV 2010

Sound Absorption $\alpha_W = 0,65$


Sound Absorbing Classification **C** (high absorbing)

Single number rating acc. ASTM C 423: SAA = 0,62

Classification acc. ASTM E 1264: NRC = 0,60

Ceiling Void: 200 mm

Frequency in [Hz]	125	250	500	1000	2000	4000
Sound Absorption coefficient α_s	0,32	0,57	0,67	0,60	0,56	0,51

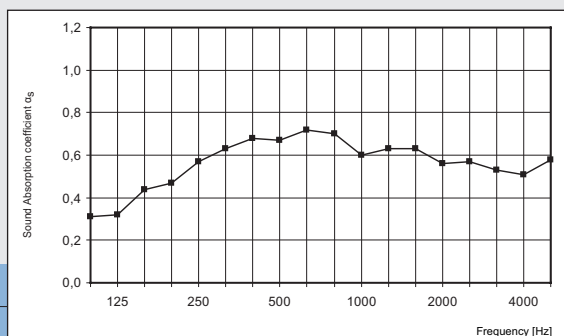

Back of tile laminated with
Acoustic fleece AV 2010 +
Glass wool sound protection board SSP 1, 30 mm

Sound Absorption $\alpha_W = 0,70$

Sound Absorbing Classification **C** (high absorbing)

Single number rating acc. ASTM C 423: SAA = 0,66

Classification acc. ASTM E 1264: NRC = 0,65

Ceiling Void: 200 mm

Frequency in [Hz]	125	250	500	1000	2000	4000
Sound Absorption coefficient α_s	0,38	0,58	0,68	0,68	0,68	0,62

